



SSL



固態能源科技 產品型錄

Product introduce 2021



26W 外置平板燈(2 呎×2 呎)


色 溫	4000K	6500K
料 號	SL-DA2622UN46001	SL-DA2622UW46001
電 壓	100~240V AC	
功 率	26 W	
光 通 量	4000 LM	
演 色 性	≥ 80	
發光角度	110°	
燈具尺寸	597×597×35 mm	

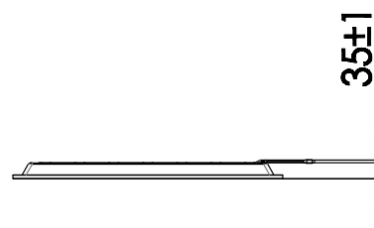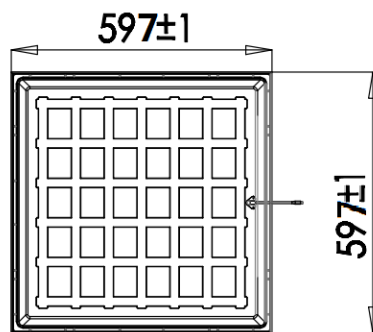


40W 外置平板燈(2 呎×2 呎)





色 溫	6500K
料 號	SL-DA4022UW07003
電 壓	100~240V AC
功 率	40 W
光 通 量	4800 LM
演 色 性	≥ 80
發光角度	120°
燈具尺寸	598×598×35 mm

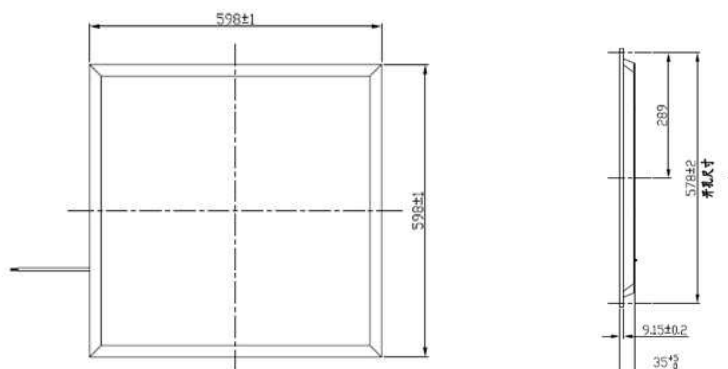

33W 薄型投射燈

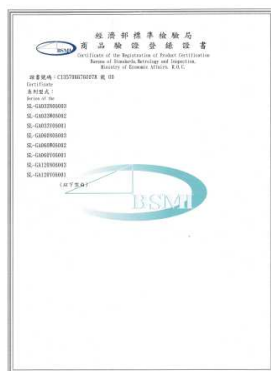


色 溫	3000K	5700K
料 號	SL-GA033Y06001	SL-GA033W06002
電 壓	100~240V AC	
功 率	33 W	
光 通 量	3600 LM	
演 色 性	≥ 80	
發光角度	110°	
防水防塵等級	IP 66	
淨 重	830g±5%	

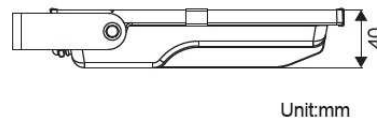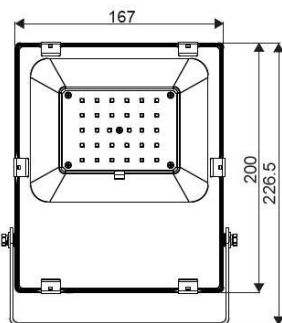



5700K



60W 薄型投射燈

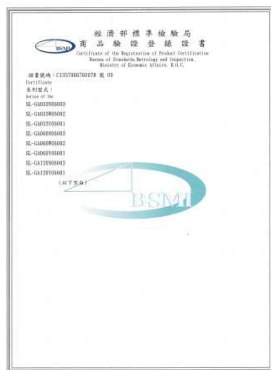

色 溫	3000K	5700K
料 號	SL-GA060Y06001	SL-GA060W06002
電 壓	100~240V AC	
功 率	60 W	
光 通 量	7000 LM	
演 色 性	≥ 80	
發光角度	110°	
防水防塵等級	IP 66	
淨 重	1530g±5%	

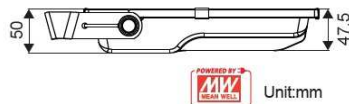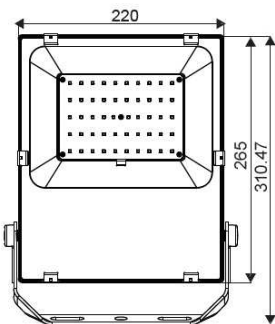



5700K



85W 3000K 薄型投射燈




色 溫	3000K			
發光角度	20°	40°	60°	110°
料 號	SL-GA085Y 06001	SL-GA085Y 06004	SL-GA085Y 06002	SL-GA085Y 06003
電 壓	100~240V AC			
功 率	85 W			
光 通 量	11000 LM			
演 色 性	≥ 80			
防水防塵等級	IP 66			
淨 重	3800g±5%			

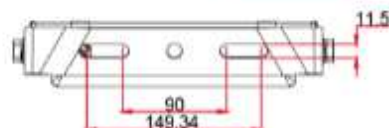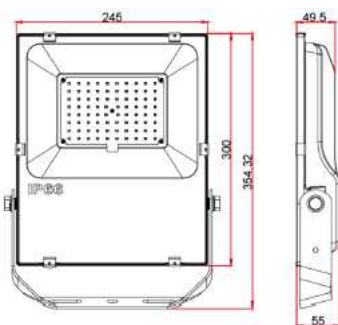



5700K



85W 4000K 薄型投射燈

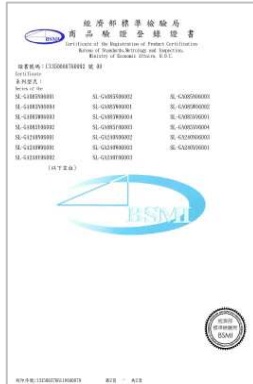


色 溫	4000K			
發光角度	20°	40°	60°	110°
料 號	SL-GA085N 06001	SL-GA085N 06004	SL-GA085N 06002	SL-GA085N 06003
電 壓	100~240VAC			
功 率	85 W			
光 通 量	11000 LM			
演 色 性	≥ 80			
防水防塵等級	IP 66			
淨 重	3800g±5%			

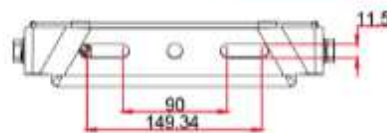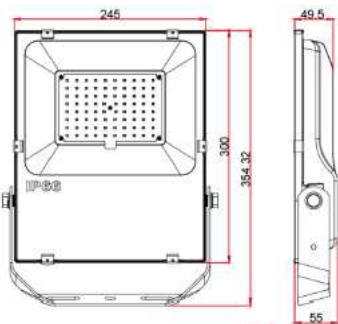




5700K



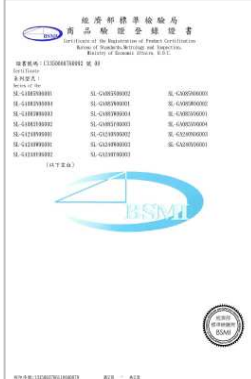


85W 5700K 薄型投射燈



色 溫	5700K			
發光角度	20°	40°	60°	110°
料 號	SL-GA085W 06001	SL-GA085W 06004	SL-GA085W 06002	SL-GA085W 06003
電 壓	100~240V AC			
功 率	85 W			
光 通 量	11000 LM			
演 色 性	≥ 80			
防水防塵等級	IP 66			
淨 重	3800g±5%			

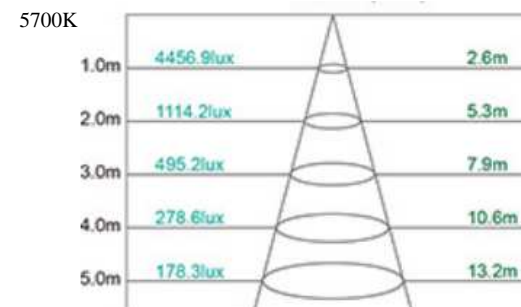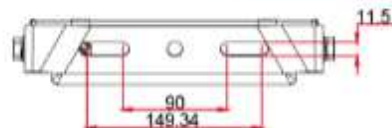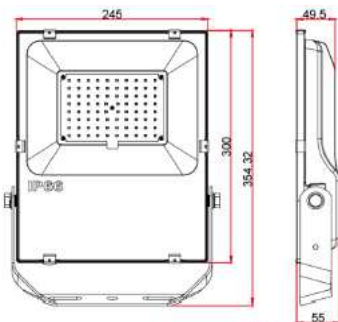


120W 3000K 薄型投射燈

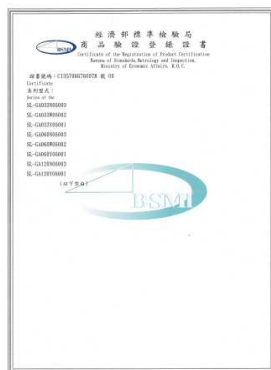


色 溫	3000K		
發光角度	20°	40°	110°
料 號	SL-GA120Y0 6002	SL-GA120Y0 6003	SL-GA120Y0 6001
電 壓	100~240V AC		
功 率	120 W		
光 通 量	14000 LM		
演 色 性	≥ 80		
防水防塵等級	IP 66		
淨 重	4050g±5%		

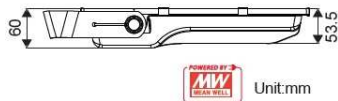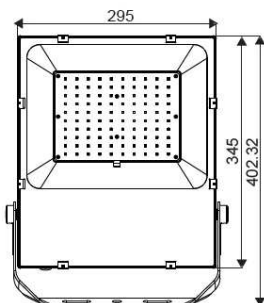


5700K

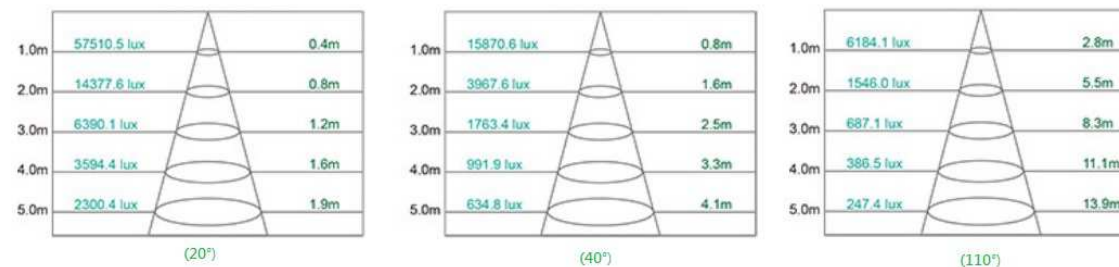


120W 4000K 薄型投射燈

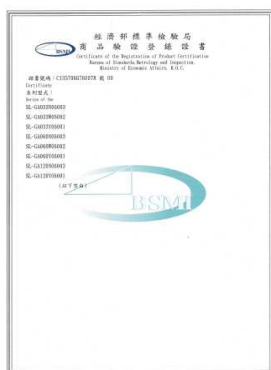



色 溫	4000K		
發光角度	20°	40°	110°
料 號	SL-GA120N0 6001	SL-GA120N0 6002	SL-GA120N0 6003
電 壓	100~240V AC		
功 率	120 W		
光 通 量	14000 LM		
演 色 性	≥ 80		
防水防塵等級	IP 66		
淨 重	4050g±5%		

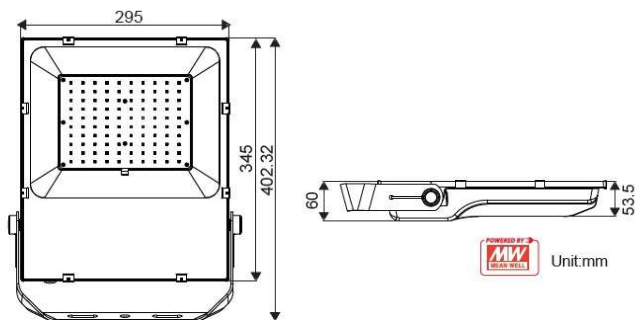



5700K

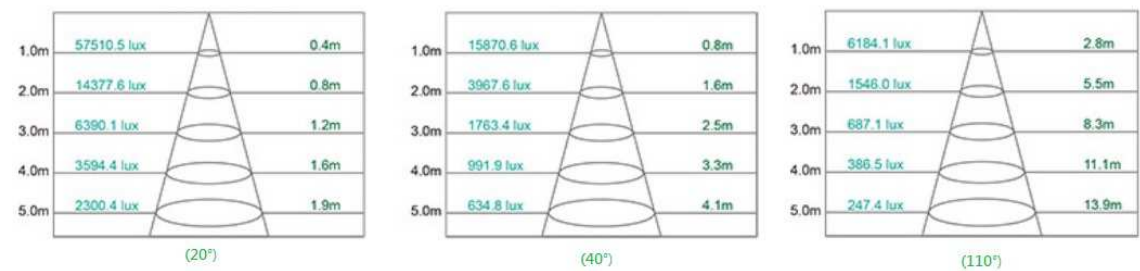


120W 5700K 薄型投射燈

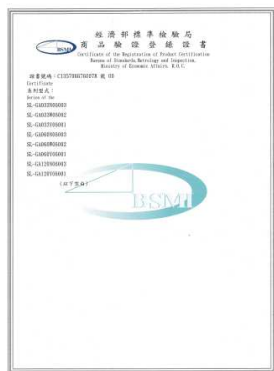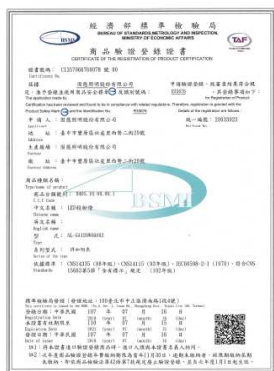

色 溫	5700K		
發光角度	20°	40°	110°
料 號	SL-GA120W0 6004	SL-GA120W0 6005	SL-GA120W0 6002
電 壓	100~240V AC		
功 率	120 W		
光 通 量	14000 LM		
演 色 性	≥ 80		
防水防塵等級	IP 66		
淨 重	4050g±5%		

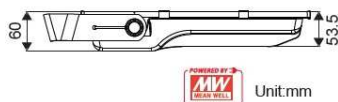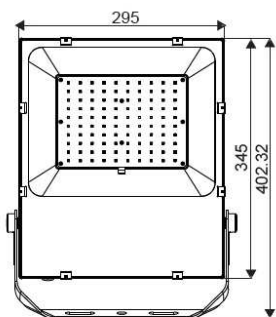



5700K

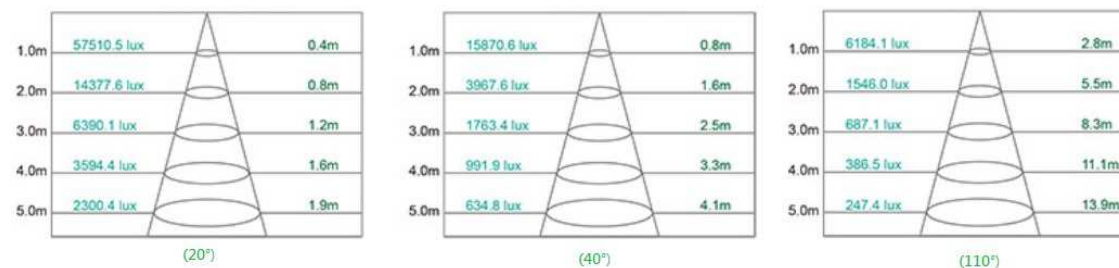

60W Plus 天井燈




色 溫	5000K		
發光角度	30°	60°	110°
料 號	SL-GB060W0 6008	SL-GB060W0 6009	SL-GB060W0 6010
電 壓	100~240VAC		
功 率	60 W		
光 通 量	7600 LM	7600 LM	8500 LM
演 色 性	≥ 80		
淨 重	2400±5%		

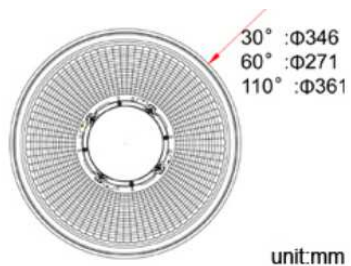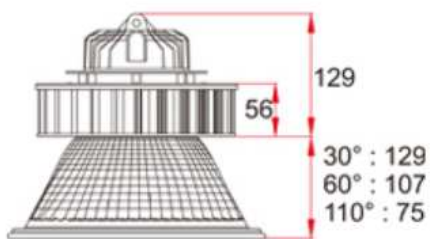

5000K



(30°)

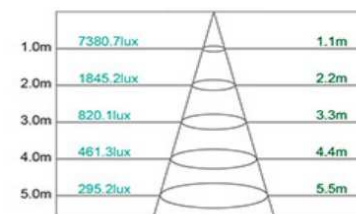

(60°)





(110°)




105W 天井燈



色 溫	5000K		
發光角度	30°	60°	110°
料 號	SL-GB105W0 6007	SL-GB105W0 6001	SL-GB105W0 6005
電 壓	100~240V AC		
功 率	105 W		
光 通 量	12300 LM	12300 LM	13000 LM
演 色 性	≥ 80		
淨 重	3000±5%		

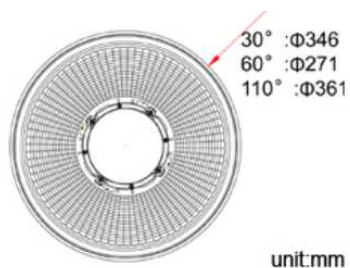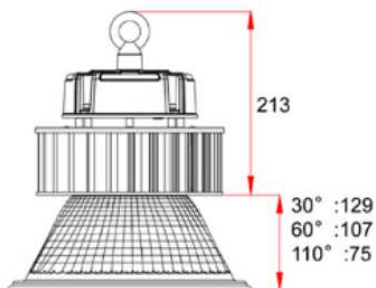

5000K

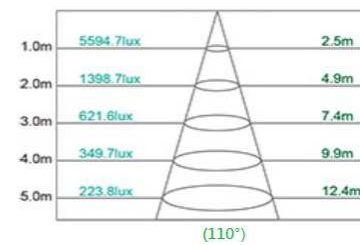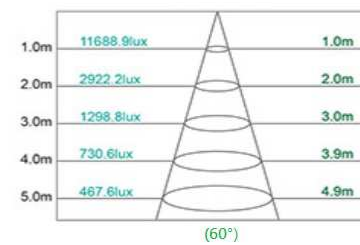
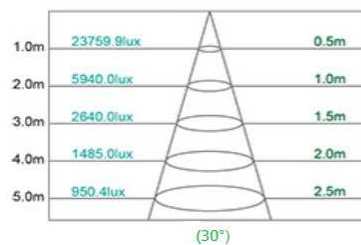




165W 天井燈



色 溫	5000K		
發光角度	30°	60°	110°
料 號	SL-GB165W0 6004	SL-GB165W0 6005	SL-GB165W0 6001
電 壓	100~240V AC		
功 率	165 W		
光 通 量	21000 LM		
演 色 性	≥80		
淨 重	4500±5%		

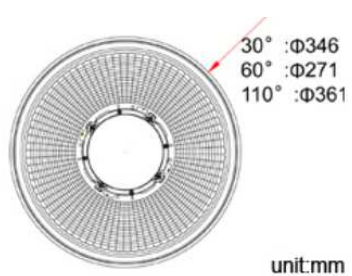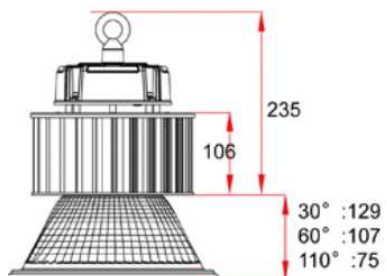

5000K

